



SunComm

SunComm Technology Co., Ltd

**SC-9600C-4GW (C-type USB) 4G Fixed
Wireless Phone with WIFI Hotspot,
WAN/LAN**




1. Specifications:

Frequency Support	LTE Bands: 3GPP Release 9 CAT4 Band B1/B3/B5/B7/B8/20/B28/38/40/B41
	WCDMA: Pentaband MTS/HSPA/HSPA+/DC-HSPA+ Bands B1/B5/B8
	GSM/DCS: Quadband GSM/GPRS/EDGE 850/900/1800/1900
Data Throughput	LTE Mode: Downlink: Up to 150 Mbps Uplink: Up to 50 Mbps
	DC-HSPA Mode: Downlink: Up to 42 Mbps Uplink: Up to 5.76 Mbps
	GPRS/EDGE Mode: GPRS:171.2kbps Kbps EDGE:384kbps
Standards	IEEE 802.11n/g/b IEEE 802.3u IEEE 802.3i
Wi-Fi Data Rates	Up to 150 Mbps with 802.11n AP mode 6/9/11/12/18/24/36/48/54 Mbps in 802.11g 1/2/5.5/11 Mbps in 802.11b mode
Wireless Security	64/128-bit WEP (Wired Equivalent Privacy) WPA & WPA2 (Wi-Fi Protected Access) WPS (Wi-Fi Protected Setup)
Firewall	Network Address Translation (NAT) Stateful Packet Inspection (SPI)
Advanced Features	Port forwarding DMZ (Demilitarized Zone) MAC Filter
Call mode	4G VOLTE call mode
Call status	Handheld call status Hands free call status

telephone book	support phone book storage, addition, editing, deletion, and complete deletion Support 500 sets of phone books
SMS	Receive SMS Send SMS 200 sets of inboxes 100 sets of shipping boxes 50 sets of draft boxes
Call records	Support 100 received calls Support 50 missing calls Support 50 dialed phone numbers
Sound settings	Support ringtone types and volume settings Support earpiece volume setting Support hands-free volume setting Support SMS type and volume settings Support power on/off ringtone on/off settings
Other functions	Support alarm clock function Support calculator function Support calendar function
Remote Upgrade	Support
LCD display screen	Support black and white STN display screen Supports 128 * 64 resolution Support grass green backlight
LED Status Indicators	WAN/LAN WIFI
Device Interfaces	DC power interface One 10/100 Ethernet WAN/LAN ports 1 TYPE-C USB interface Standard NANO-SIM/UICC slot One RJ 9 4 P 4 C Handle interface SMA antenna interface
The power adapter	12V 1A, European standard
Battery	Lithium-ion battery, 3.7V 2000mA
Dimensions	190*165*68(Antenna excluded)
Weight	495 g

Temperature	Operating: -10 to 50 °C Storage: -20 to 70 °C
Humidity	Operating: 10% to 90% non-condensing Storage: 0 to 95% non-condensing
Packaging attachments	4G FWP x 1
	The power adapter x 1
	an instruction manual x 1
	1.5M Network cable x 1
	Lithium-ion battery x 1

2. Keypad layout:

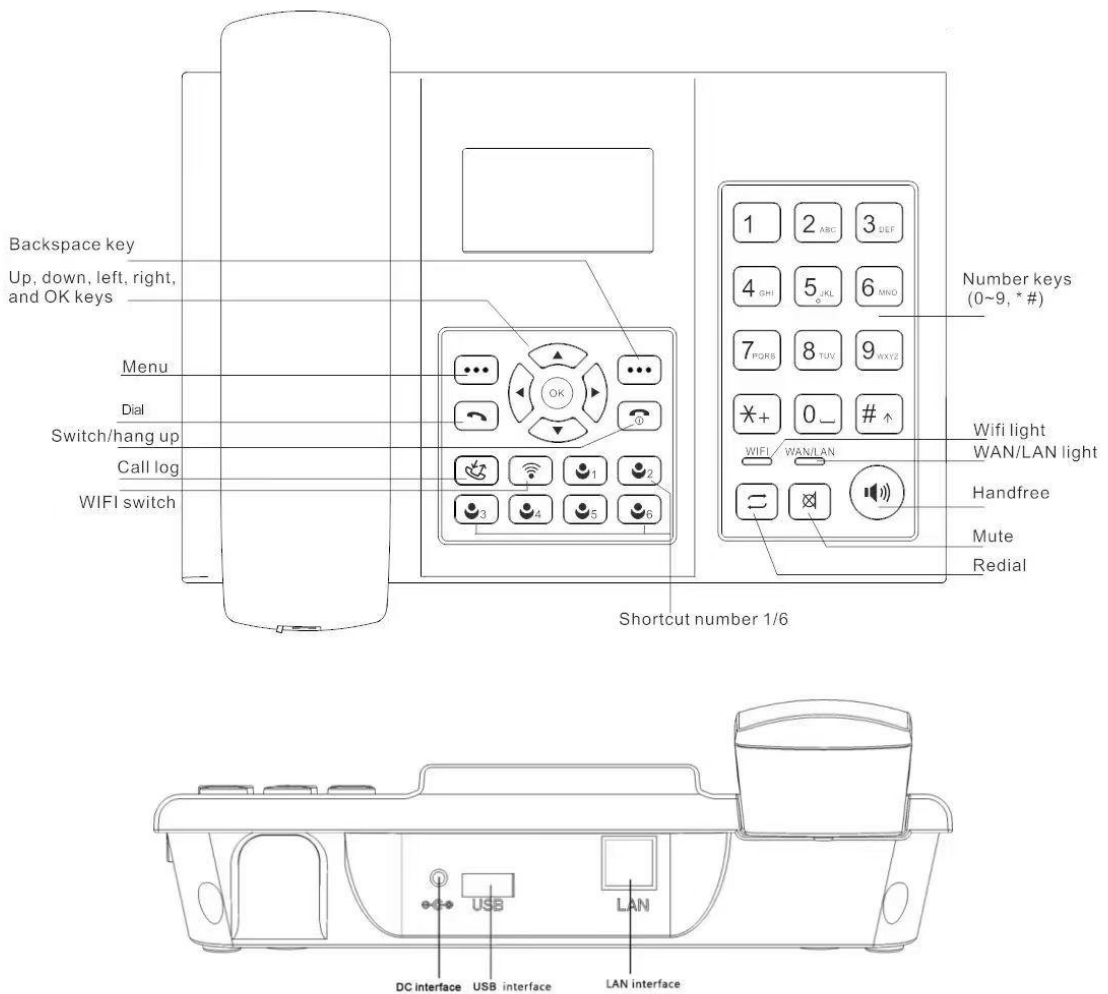

SunComm Technology Co., Ltd

7F, No. 53, Jian-Kang Rd., Zhong-he Dist., New Taipei City, Taiwan 23586

www.SunComm-4glte.com.tw www.SunComm.com.tw www.SunComm.asia

Tel: 886-2-3234 1496 Fax: 886-2-3234 1393 E-mail: gary@SunComm.com.tw

China: www.SunComm.cn Tel: +86-136 5142 2805

